



WENZHOU BOYO ELECTRIC APPLIANCE COMPANY LIMITED

The 5th floor block B, NO.89 Xing'an Road, Puzhou Street,
Longwan District, Wenzhou, Zhejiang, China
Tel: (86-577)86580818
Cell/Wechat/Whatsapp: +86 15622557969
Email: Cherry.liao@boyoelectric.com

ABOUT US

Wenzhou BOYO Electric Appliance Co., Ltd. is a main professional supplier in beauty care electronic products & home electronic products in China. We have more than 10 years of experience in this field.

We have various kinds of products and they are 100% for export. Our customers are from all over the world, such as North America, Europe, South America, the Middle East, East Asia and Africa.

Products are of CE/CB/GS/UL/ETL/INMETRO/SAA/SABS/PSE/KC etc. We can do OEM/ODM/SOLUTION/SHARS and also allow Special Area agent cooperation. High quality, perfect service and attractive prices always together with BOYO Products.

BOYO growth needs your suggestions and cooperation, that teach us to improve, and satisfied to you day to day!

You are very welcomed to contact us at any time. We will demonstrate our best efforts to serve you and provide you the best quality products with the best designed package. Your trust and satisfaction are the biggest rewards to us. We welcome your OEM orders!




Strong Wind Hair Dryer



LD2355

- *Product size: 80x97x250mm
- *Brushless motor with high speed 110,000rpm
- *Digital display show speed & temperature settings
- *220-240V 50/60Hz 1250-1600W
- *Slide switch for 0-1-2 speed settings
- *Touch switch for 3 heat settings
- *Press and hold the temperature button for 2 seconds to alternate between hot and cold
- *Overheating protection
- *Automatic cleaning every 60 times
- *22m/s storm speed
- *Ionic release 516 million

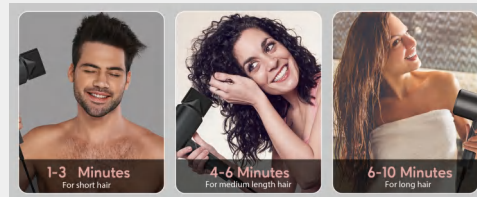

LD2342

- * AC 220V 50Hz, 1400W
- * High speed bladeless motor
- * 110,000RPM, 18m/s
- * Low noise 84.5dB
- * Negative Ion function
- * Precise cold & hot air circulating system
- * Magnetic suction nozzle



LD2181

- * AC 220V 50Hz, 1400W
- * High speed bladeless motor
- * 110,000RPM, 18m/s
- * Low noise 84.5dB
- * Negative Ion function
- * Precise cold & hot air circulating system
- * Magnetic suction nozzle



LD2391

- * BLDC motor speed 110,000
- * Power: 1200W-1600W
- * With 12 interchangeable accessories for choice
- * 3 speeds: 14m/s 15m/s 17m/s
- * 3 temperatures: 80 C / 100 C / 130 C
- * Cool button
- * Noise: 75dba
- * Self-cleaning function
- * With 2*0.75*1.8 power cord



LD2392

- * 5 in 1 hair dryer
- * BLDC motor speed 110,000
- * Negative ion value: 60 million - 200 million (customized)
- * Rated power: 1600W
- * Rated voltage: 110V-220V
- * Temperature control type: Intelligent constant temperature
- * Temperature: constant temperature, high, medium and low
- * Wind speed: High medium low
- * Temperature adjustment: 60/80/100 C
- * Maximum noise: 50 cm test less than 80 dB
- * With negative



LD2393

- * BLDC motor speed 110,000
- * Power: 1600W-1800W
- * Voltage: 220-240V, 50/60Hz
- * 3 speeds: 14m/s 15m/s 23m/s
- * 3 temperatures: 70 C / 80 C / 90 C
- * Cool button
- * With 2*0.75*2m power cord



LD2207

- * 5 in 1 hair dryer
- * BLDC motor speed 110,000
- * Rated power: 1600W
- * Rated voltage: 110V-220V
- * Temperature control type: Intelligent constant temperature
- * With negative



LD2228

- * BLDC motor speed 110,000
- * Power: 1200W-1600W
- * Noise: 75dB
- * 2 speed
- * With three nozzle



LD2102

- * 220-240V 50Hz 1600-1800W
- * DC motor
- * 2 speed
- * Cool shot function
- * Magnetic absorption wind nozzle
- * Automatic shutdown when overheating
- * Optional: IONIC function



LD2182

- * Professional ionic hair dryer
- * 220-240V50/60Hz, 1600-2000W
- * DC motor
- * With concentrator
- * Cool shot function
- * 2 heat settings
- * Straight handle
- * Over heat protection



LD2183

- * DC motor
- * 1400
- * 2 speed and 3 heat
- * With Concentrator
- * Folding handle
- * Cable: 1.8m, exposed wire: 1.6m
- * Overheating protection
- * Cool shot button



LD2185

- * 220V 50Hz, 1800-2100W
- * DC motor
- * 2 speed
- * Cool shot function
- * Folding handle
- * Double-layer of dust-proof net
- * Automatic shutdown when overheating
- * Product size: 127x76x250mm
- * Optional: Ionic function



LD2126

- * 220V 50Hz, 1800-2100W
- * DC motor 2 speed
- * Cool shot function
- * Folding handle
- * Double-layer of dust-proof net
- * Automatic shutdown when overheating
- * Product size: 127x76x250mm
- * Optional: Ionic function



LD2184

- * 220V 50Hz 1800-2100W
- * DC motor
- * 2 speed
- * Cool shot function
- * 3 layers of dust-proof net
- * Double-layer wind nozzle
- * Automatic shutdown when overheating
- * Product size: 127x76x250mm
- * Optional: IONIC function



LD2186

- * 220-240V, 50/60Hz, 1850-2200W/2000-2400W
- * AC motor
- * 2 Speed & 3 Heat Settings
- * Cool shot function
- * Overheating protection
- * Styling concentrator
- * Hanging loop



LD2007

- * 220V 50Hz, 1800-2100W
- * DC motor
- * 2 speed
- * Cool shot function
- * Double-layer of dust-proof net
- * Magnetic absorption wind nozzle
- * Optional: ionic function



LD2038

- * 220V 50Hz 1800-2100W
- * DC motor
- * 2 speed
- * Cool shot function
- * 3 layers of dust-proof net
- * Automatic shutdown when overheating



LD2188

- * 220-240V, 50/60Hz, 1850-2200W/2000-2400W
- * DC motor
- * Ionic function for choice
- * 2 rocker switches provide 2 speed & 3 heat settings
- * Cool shot function
- * Removable filter cover
- * Hanging loop
- * Two power for choice



LD2170

- * DC motor
- * 220-240V 50/60Hz 1850W-2200W
- * Switch for 0-1-2 heat/speed Settings
- * Cool shot function
- * Safety cut off
- * Styling concentrator
- * Hanging-up loop



LD2431

- * 230V 50Hz 800-1000W
- * AC motor
- * 2 speed
- * With one nozzle



LD2429

- * 230V 50Hz 800-1000W
- * AC motor
- * 2 speed
- * With one nozzle



LD2085



LD2187

- * 230V 50Hz 800-1000W
- * AC motor
- * 2 speed
- * With one nozzle



LD2432

- * 230V 50Hz 800-1000W
- * AC motor
- * 2 speed
- * With one nozzle



LD2430

- * 230V 50Hz 800-1000W
- * AC motor
- * 2 speed
- * With one nozzle



LD2290

- * 220V-240V, 50-60Hz, 1600W
- * DC motor
- * Magnetic Separator
- * Switch for 0-1-2 setting
- * Cool shot function
- * Overheat protection function
- * Optional: Ionic function



LD2291

- * 220-240V 60Hz 1800W
- * Foldable handle
- * DC motor
- * Magnetic Separator
- * Optional: Ionic function
- * Switch for 0-1-2 setting
- * Overheat protection function
- * Optional: Ionic function



LD2121

- * 230V 50Hz 800-1000W
- * AC motor
- * 2 speed
- * With one nozzle



LD2150

- * 230V 50Hz 1200W
- * AC motor
- * 2 speed
- * With one nozzle
- * Foldable handle



LD2341

- * 220-240V~ 50-60H 2200W
- * AC motor
- * 2 speed
- * With three nozzle



LD2362

- * DC motor
- * Accessories: professional concentratorX1
- * Slide switch provide 0-1-2 settings
- * with Hanging loop
- * Low power
- * Low radiation
- * Low noise
- * Foldable handle for easy storage
- * Ultra High appearance level with stylish shape



LD2108

- * 230V 50Hz 1200W
- * AC motor
- * 2 speed
- * With one nozzle



LD2024

- * 230V 50Hz 1200W
- * AC motor
- * 2 speed
- * With one nozzle

LD2223

- * 6-in-1 multi-functional Hot Air Brush
- * Voltage: 220-240
- * VFrequency: 50-60Hz
- * Power: 1000-1200W
- * With SIX attachments
- * 360° swivel PVC power cord
- * 2X0.75mm Exposed 1.8m length
- * VDE plug

6ⁱⁿ1 MODELING HOT AIR BRUSH



LD2143

- * Voltage: 220-240V
- * Frequency: 50-60Hz
- * Power: 1000-1200W
- * Heating element: PTC
- * 360° swivel power cord



LD2144

- * Voltage: 220-240V
- * Frequency: 50-60Hz
- * Power: 1000-1200W
- * Heating element: PTC
- * 360° swivel power cord



LD2101

- * 6-in-1 multi-functional Hot Air Brush
- * Voltage: 220-240V
- * Frequency: 50-60Hz
- * Power: 1000-1200W
- * With six attachments for choice
- * 360° swivel PVC power cord



LD2097

- * 3-in-1 multi-functional Hot Air Brush
- * Voltage: 220-240V
- * Frequency: 50-60Hz
- * Power: 1000-1200W
- * Heating element: PTC
- * With three attachments for choice
- * 360° swivel power cord



LD2148

- * 5-in-1 multi-functional Hot Air Brush
- * Voltage: 220-240V
- * Frequency: 50-60Hz
- * Power: 1000-1200W
- * Heating element: PTC
- * With five attachments for choice
- * 360° swivel power cord

LD2394

- * Voltage: 110V-220V, 50Hz/60Hz
- * Power: 48W
- * Heating element: PTC
- * Temperature display: 120-210°C
- * 1 hour automatic power off
- * 360 degree swivel cord with VDE plug





LD2373

- * Voltage: 220-240V
- * Frequency: 50-60Hz
- * Power: 1000-1200W
- * Heating element: PTC
- * 360° swivel PVC power cord



LD2083

- * Voltage: 220-240V
- * Frequency: 50-60Hz
- * Power: 1000-1200W
- * Heating element: PTC
- * 360° swivel PVC power cord



LD2302

- * 220-240V 50/60Hz 800W
- * Rotating hot air style
- * 1 speed & 3 heat settings
- * With cool function
- * 360 degree swivel cord



LD2301

- * Hot air style
- * 230V 50Hz, 800W
- * 1 speed and 3 heat settings with
- * Cool function
- * 360° swivel cord
- * Safety cut off



LD2376

- * Voltage: 220-240V
- * Frequency: 50-60Hz
- * Power: 1000-1200W
- * Heating element: PTC
- * 360° swivel PVC power cord




LD2371

- * AC220-240V 50/60Hz, 1000W
- * DC motor
- * 0-1-2 heater Settings
- * Oval brush design
- * 360° swivel cord



LD2299

- * Hot air style
- * 230V 50Hz, 800W
- * 1 speed and 3 heat settings with
- * Cool function
- * 360° swivel cord
- * Safety cut off

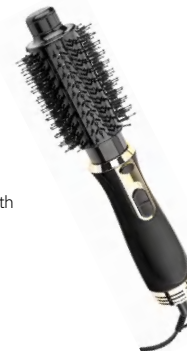

LD2304

- * 220-240V~, 50/60Hz, 800W
- * DC motor
- * 0-1-2-C switches settings
- * 360° cable hinge
- * Hanging loop



LD2378

- * Voltage: 220-240V
- * Frequency: 50-60Hz
- * Power: 1000-1200W
- * Heating element: PTC
- * 360° swivel PVC power cord



LD2116

- * Voltage: 220-240V
- * Frequency: 50-60Hz
- * Power: 1000-1200W
- * Heating element: PTC
- * 360° swivel PVC power cord



LD2303

- * Hot air styler
- * 220-240V, 50Hz, 800W
- * 1 speed & 3 heat settings with cool shot function
- * 360 degree swivel cord
- * Safety cut off
- * Ionic function for choice



LD2300

- * Hot air styler
- * DC motor
- * 220-240V 50Hz 1200W
- * 0-1-2-COOL heat setting
- * 360 Degree Swivel Cord
- * Hang up loop
- * Ionic function for option



LD2008

- * Voltage: 220-240V
- * Frequency: 50-60Hz
- * Power: 1000-1200W
- * Heating element: PTC
- * 360° swivel PVC power cord

RECHARGEABLE

Electrical Hair straightener

LD2286

- * Mini Rechargeable hair straightener
- * Charging time: 90mins
- * Discharging time: 40mins
- * Temperature: 140°C, 160°C, 180°C, 200°C
- * On/Off switch



LD2319

- * Three gear temperature adjustment 160°C, 180°C, 200°C
- * Actual maximum temperature: 190±10°C
- * Roll and straight dual use
- * PTC heater
- * Ceramic coating
- * Standby time 60 minutes
- * Voltage 220V 50Hz
- * Power: 25W



LD2062

LD2399

- * Rechargeable Hair straightener brush
- * Ceramic coating pate
- * PTC heat element
- * On/Off switch
- * Three gear temperature adjustment 160°C, 180°C, 200°C
- * With 2x1800mAh Litium battery
- * Charging time :4 hours ,Working time :40 mins
- * USB cable for charging
- * Add ionic (for choice)



LD2231

- * With 2x2600mAh L-tium battery
- * Ceramic coating plate
- * PTC heat elemnent
- * On/Off switch
- * Lockalole switch
- * USB cable for charging
- * With big capacity to be used as a portable charger
- * Worldwide voltage




LD2229

- * Rechargeable Hair straightener
- * With 1x2600mAh Litium battery
- * Ceramic coating pate
- * PTC heat element
- * On/Off switch
- * Lockable switch
- * USB cable for charging
- * With big capacity to be used as a portable charger
- * Worldwide voltage



LD2233

- * Battery: 4500mAh lion battery, 21700
- * Output :DC5V
- * Power: 25W
- * Power indicate :20% 75% 100%
- * Temperature indicate: 145°C, 165°C, 185°C
- * Charging time: about 4-6 hours
- * Working time: lasts above 45 minutes for 185 degree
- * Auto shut-off 40 minutes
- * Reaches full temp.in 2-3 minutes
- * Battery % flashes setting flashes during charge, stays on during use
- * With 1m USB charging cable



LD2232

- * Rechargeable hair curler
- * Ceramic plate
- * Fast Heating element
- * On/off switch



LD2230

- * Rechargeable Hair straightener
- * With 1x2600mAh Litium battery
- * Ceramic coating pate
- * PTC heat element
- * On/Off switch
- * Lockable switch
- * USB cable for charging
- * With big capacity to be used as a portable charger
- * Worldwide voltage



LD2298

- * Rechargeable Hair Straightener DC 5V 2A
- * On/Off Button & On/Off indicator
- * PTC fast heating
- * Max. temperature: 200°C
- * Temperature settings: 160°C, 180°C, 200°C
- * Lock switch
- * Type-C chargeable



LD2040

- * Rechargeable lithium battery 2600mAh
- * 4 Hours full charging
- * 60 mins using time
- * Constant temperature 200°C
- * On/Off switch
- * Product size: 19.3x3.3x3.6mm
- * Hot plate size: 60x10mm
- * Product weight: 200g



LD2039

- * Rechargeable lithium battery 2600mAh
- * 4 Hours full charging
- * 60 mins using time
- * Constant temperature 200°C
- * On/Off switch
- * Product size: 19.3x3.3x3.6mm
- * Hot plate size: 60x10mm
- * Product weight: 200g



LD2343

- * Rechargeable lithium battery 2600mAh
- * 4 Hours full charging
- * 60mins using time
- * Constant temperature 200°C
- * On/Off switch



LD2349

- * Ceramic coating plate
- * PTC Heating element
- * LED display
- * Temperature: 170°C, 190°C, 210°C
- * Power display: 20%, 96%, 75%, 100%
- * 4000mAh Lithium battery
- * Charging time: 4-5h
- * Using time: 40-60min(standby time)



LD2347

- * 160/180/200°C three-speed temperature adjustment
- * Type-C 0.8m data cable
- * DC5V/1A~ 2600mAh
- * Charging 3~3.5 hours
- * Full-charge working time
- 200°: 25-30min
- 180°: 30-35min
- 160°: 35-40Min
- * Automatic shutdown after 20min or 30min
- Over-temperature protection



LD2234

- * Battery: 4500mAhx2(9000mAh) lion battery
- * Output: DC 5V 35W
- * Power indicate: 25%, 75%, 100%
- * Temperature indicate: 160°C, 190°C, 220°C
- * Charging time: about 4-5 hours (2A)
- * Working time: lasts above 70-100 minutes
- * Auto shut-off 20 minutes
- * Reaches full temp. in 50 seconds



LD2236

- * Ceramic coating plate
- * PTC Heating element
- * LED display
- * Temperature: 170°C, 190°C, 210°C
- * Power display: 20%, 96%, 75%, 100%
- * 4000mAh Lithium battery
- * Charging time: 4-5h
- * Using time: 40-60min(standby time)
- * With motion sensor function



LD2168

- * Rechargeable lithium battery 2600mAh
- * 3.5 Hours full charging
- * 20 mins auto shut off
- * 3 heat settings 160°C, 180°C, 200°C
- * On/Off switch
- * Product size: 200x 26 x 36mm
- * Hot plate size: 70x18mm
- * Product weight: 165g



LD2176

- * Mini Rechargeable hair straightener
- * 3.5 Hours full charging
- * 20mins using time
- * On/Off switch



LD2016

- * Rechargeable lithium battery 2600mAh
- * 3.5 Hours full charging
- * 20 mins auto shut off
- * 3 heat settings 160°C, 180°C, 200°C
- * On/Off switch
- * Product size: 200x 26 x 36mm
- * Hot plate size: 70x18mm
- * Product weight: 165g



LD2235

- * 4000mAhx2 Lithium battery
- * Reaches full heat in 2-3 minute
- * Power indication light
- * 3 temperature indicators: 165°C, 185°C, 205°C
- * USB charging
- * Charging time: 4-5hours
- * Working time: about 50-60mins



LD2227

- * Mini Rechargeable hair straightener
- * 3.5 Hours full charging
- * 20mins using time
- * On/Off switch
- * Auto shut-off 20 minutes



LD2153

- * AC 100-240V 50/60Hz
- * 25mm Ceramic coating barrel
- * PTC Heating element
- * On/off switch
- * LED indicator
- * 360 degree swivel cord



LD2277

- * AC 100-240V 50/60Hz
- * 25mm Ceramic coating barrel
- * PTC Heating element
- * Temperature setting 120-230 C
- * LCD display
- * 360 degree swivel cord




LD2278

- * AC 100-240V 50/60Hz
- * 25mm Ceramic coating barrel
- * PTC Heating element
- * On/off switch
- * LED indicator
- * 360 degree swivel cord



LD2279

- * AC 100-240V 50/60Hz
- * 25mm Ceramic coating barrel
- * PTC Heating element
- * On/off switch
- * LED indicator
- * 360 degree swivel cord

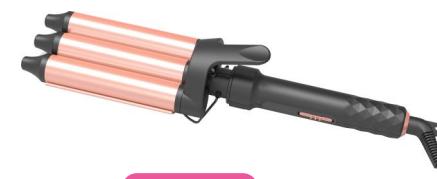

LD2153

- * AC 100-240V 50/60Hz
- * 25mm Ceramic coating barrel
- * PTC Heating element
- * On/off switch
- * LED indicator
- * 360 degree swivel cord



LD2020

- * AC 100-240V 50/60Hz
- * 25mm Ceramic coating barrel
- * PTC Heating element
- * LED indicator
- * 4 level temperature setting
- * 360 degree swivel cord



LD2026

- * AC 100-240V 50/60Hz
- * 25mm Ceramic coating barrel
- * PTC Heating element
- * LED indicator
- * 4 level temperature setting
- * 360 degree swivel cord



LD2064

- * AC 100-240V 50/60Hz
- * 25mm Ceramic coating barrel
- * PTC Heating element
- * On/off switch
- * LED indicator
- * 360 degree swivel cord



LD2063

- * AC 100-240V 50/60Hz
- * 25mm Ceramic coating barrel
- * PTC Heating element
- * On/off switch
- * LED indicator
- * 360 degree swivel cord




LD2308

- * AC 100-240V 50/60Hz
- * 25mm Ceramic coating barrel
- * PTC Heating element
- * Temperature setting
- * LCD display
- * 360 degree swivel cord



LD2307

- * AC 100-240V 50/60Hz
- * 25mm Ceramic coating barrel
- * PTC Heating element
- * On/off switch
- * LED indicator
- * 360 degree swivel cord



LD2165

- * AC 100-240V 50/60Hz
- * 25mm Ceramic coating barrel
- * PTC Heating element
- * Temperature setting 120-230 C
- * LCD display
- * 360 degree swivel cord



LD2001

- * AC 100-240V 50/60Hz
- * PTC Heating element
- * 25mm Ceramic coating barrel
- * Temperature setting 120-230 C
- * LCD display
- * 360 degree swivel cord



LD2315

- * Egg Roll Hair Curler
- * 110-240V 50/60Hz 60W
- * PTC heating
- * Max temperature: 210 C $\pm$ 10
- * LED indicator
- * 360 degree swivel cord



LD2316

- * Egg Roll Hair Curler
- * 110-240V 50/60Hz 60W
- * PTC heating
- * Max temperature: 210 C $\pm$ 10
- * LED indicator
- * 360 degree swivel cord



LD2003

- * AC 100-240V 50/60Hz
- * 25mm Ceramic coating barrel
- * PTC Heating element
- * On/off switch
- * LED indicator
- * 360 degree swivel cord



LD2057



LD2142

- * AC 100-240V 50/60Hz
- * 25mm Ceramic coating barrel
- * PTC Heating element
- * On/off switch
- * LED indicator
- * 360 degree swivel cord



LD2105

- * AC 100-240V 50/60Hz
- * PTC Heating element
- * 25mm Ceramic coating barrel
- * Temperature setting 120-230 C
- * LCD display
- * 360 degree swivel cord



LD2192

- * Egg Roll Hair Curler
- * 110-240V 50/60Hz 60W
- * PTC heating
- * Temperature setting: 120-200 C
- * LCD display
- * One hour auto shut off
- * 360 degree swivel cord



LD2002

- * AC 110-240V 50/60Hz, 65W
- * Ceramic coating barrel
- * PTC Heating element
- * "+" & "-" temperature control 100 C -230 C
- * 360 degree swivel cord



LD2128

- * Egg Roll Hair Curler
- * 110-240V 50/60Hz 60W
- * PTC heating
- * Temperature setting: 120-200 °C
- * LCD display
- * One hour auto shut off
- * 360 degree swivel cord



LD2179

- * 3 IN 1 hair straightener
- * 110-240V 50/60Hz 60W
- * PTC heating
- * LCD display
- * 360 degree swivel cord



LD2208

- * 4000mAh Lithium battery
- * Heat conductor diameter: 21mm-30mm tourmaline ceramic
- * Rated voltage: DC 5V
- * Temperature range: 150-200 °C, 30 seconds fast heating
- * 6 timers: 8 10 12 14 16 18 seconds



LD2028

- * 4000mAh Lithium battery
- * Heat conductor diameter: 21mm-30mm tourmaline ceramic
- * Rated voltage: DC 5V
- * Temperature range: 150-200 °C, 30 seconds fast heating
- * 6 timers: 8 10 12 14 16 18 seconds



LD2209

- * 5200mAh Lithium battery
- * Heat conductor diameter: 21mm-30mm tourmaline ceramic
- * Rated voltage: DC 5V
- * Temperature range: 150-200 °C, 30 seconds fast heating
- * 6 timers: 8 10 12 14 16 18 seconds



LD2041

- * 4800mAh Lithium battery
- * Heat conductor diameter: 21mm-30mm tourmaline ceramic
- * Rated voltage: DC 5V/2A
- * Temperature range: 150-200 °C, 30 seconds fast heating



LD2294

- * Egg Roll Hair Curler
- * 110-240V 50/60Hz 82W
- * PTC heating
- * 7 level temperature settings
- * LCD display
- * 360 degree swivel cord



LD2128A

- * Egg Roll Hair Curler
- * 110-240V 50/60Hz 60W
- * PTC heating
- * Temperature setting: 120-200 °C
- * LCD display
- * One hour auto shut off
- * 360 degree swivel cord



LD2210

- * 4800mAh Lithium battery
- * Heat conductor diameter: 21mm-30mm tourmaline ceramic
- * Rated voltage: DC 5V/2A
- * Temperature range: 150-200 °C, 30 seconds fast heating
- * 6 timers: 8 10 12 14 16 18 seconds

LD2244

- * AC 100-240V 50/60Hz 55W
- * 19/25/32mm Ceramic coating barrel
- * PTC Heating element
- * 5 level temperature settings
- * LED indicator
- * 360 degree swivel cord



LD2256

- * AC 100-240V 50/60Hz 55W
- * 19/25/32mm Ceramic coating barrel
- * PTC Heating element
- * 5 level temperature settings
- * LED indicator
- * 360 degree swivel cord



LD2249A

- * AC 100-240V 50/60Hz 55W
- * 19/25/32mm Ceramic coating barrel
- * PTC Heating element
- * Temperature settings 120-220 C
- * LCD display
- * 360 degree swivel cord



LD2332

- * AC 100-240V 50/60Hz 45W
- * 13-25mm Taper Ceramic coating barrel
- * PTC Heating element
- * Max temperature: 210±5 C
- * LED indicator
- * 360 degree swivel cord



LD2124

- * AC 100-240V 50/60Hz 45W
- * 13-25mm Taper Ceramic coating barrel
- * PTC Heating element
- * Max temperature: 210±5 C
- * LED indicator
- * 360 degree swivel cord



LD2130

- * AC 100-240V 50/60Hz
- * 25mm Ceramic coating barrel
- * PTC Heating element
- * 5 level temperature settings
- * One hour auto shut off
- * LCD display
- * 360 degree swivel cord



LD2177

- * Automatic hair curler
- * PTC Heating element
- * AC 100-240V 50/60Hz 45W
- * One hour auto shut off
- * Temperature display: 100-200 C
- * Barrel size: 25mm/32mm(it can)
- * LED indicator
- * 360 degree swivel cord



LD2337

- * 3 in 1 hair styler
- * 220-240V50/60Hz, 1600-2000W
- * DC motor
- * With concentrator
- * Cool shot function
- * 2 heat settings
- * Straight handle
- * Over heat protection



LD2295

- * Automatic hair culer
- * AC 100-240V 50/60Hz 48W
- * One hour auto shut off
- * PTC Heating element
- * LED indicator
- * 360 degree swivel cord



LD2395

- * Automatic hair culer
- * 220-240V50/60Hz, 1600-2000W
- * DC motor
- * With concentrator
- * Cool shot function
- * 2 heat settings
- * Straight handle
- * Over heat protection



LD2397

- * Automatic hair culer
- * Voltage: 110V-220V, 50Hz/60Hz
- * Power: 48W
- * Heating element: PTC
- * Temperature display: 160-220 C
- * 1 hour automatic power off
- * 360 degree swivel cord with VDE plug





LD2386

- * 100-240V 50/60Hz 65W
- * 13-25mm Taper Ceramic coating barrel
- * PTC Heating element
- * Temperature 80°C ~ 210°C
- * 360 degree swivel cord
- * Automatic shutdown after 1 hour



LD2411

- * 100-230V 50/60Hz 60W
- * replaceable head (19mm, 25mm, 32mm)
- * PTC Heating element
- * Max temperature: 210±5°C
- * 360 degree swivel cord



LD2418

- * 100-230V 50/60Hz 60W
- * replaceable head (19mm, 25mm, 32mm)
- * PTC Heating element
- * Max temperature: 200±5°C
- * 360 degree swivel cord
- * Automatic shutdown after 30mins



LD2419

- * Automatic curling iron with replaceable head
- * 100-240V 50/60Hz 65W
- * replaceable head (19mm, 25mm, 32mm)
- * PTC Heating element
- * 360 degree swivel cord
- * Automatic shutdown after 1 hour



LD2366

- * 110v-240v 50/60Hz 30w
- * Temperature 200°C
- * Power cord 2*0.5MM
- * 1 PTC heater
- * PTC size 55*6mm
- * Aluminum plate size 112*13.5mm
- * Product size 240*50*50MM
- * Product weight 228g



LD2367

- * 110v-240v 50/60Hz 33w
- * Temperature 200°C
- * Power cord 2*0.5MM
- * 2 PTC heaters
- * PTC size 35*8mm
- * Aluminum plate size 80*25mm
- * Product size 220*28*43.5MM
- * Product weight 232g



LD2346

- * Product specifications M9/M25/M32/M38
- * 110v-240v 50-60Hz
- * Power: M9- 26W/M25-54W/M32-71W/M38-78W
- * LCD display
- * Temperature 120-140-160-180-200°
- * Power cord 360° rotation
- * Product high temperature resistance
- * One-button switch to adjust temperature



LD2353

- * Hair curler with digital display
- * 110-240V 50/60HZ 45-60w
- * Tube size: 19/22/25mm
- * Heating element: PTC
- * Temperature: 150/170/190/210/230°C
- * Power-on temperature: 210°C
- * Power cord: 1.5m with swivel
- * Automatic shutdown after 60 minutes



LD2408

- * 110-240V 50/60HZ 30w
- * Tube size: 9/13/19mm
- * Temperature 200°C
- * 360 degree swivel cord
- * Fast heating: 180S reach to



LD2135

- * 3 IN 1 hair curler, hair straightener and hair crimper
- * PTC heating elements
- * Ceramic Coating barrel
- * On/OFF switch
- * Cool tip
- * 360 degree swivel power cord



LD2263

- * 110-240V,30W
- * Heating plate size: 75x20mm
- * Body size: 270x25x44mm
- * Temperature display: 120°C-220°C
- * 10°C in one gear, default 180 when power on
- * Automatic shutdown after 60 minutes
- * 360°swivel power cord



LD2027

- * PTC heat element
- * Ceramic coating plate ,size 9.5x3.2cm
- * 110-240V 50/60Hz 35W
- * Max temperature around 220C
- * On/Off switch
- * 360 degree swivel cord
- * Product size:28*38*4cm



LD2159

- * 3 in 1 hair curler
- * 110-240V 50/60HZ 45w
- * Heating element: PTC
- * LED display
- * 360 degree swivel cord



LD2282

- * PTC heat element
- * Ceramic coating plate ,size 9.5x3.2cm
- * 110-240V 50/60Hz 35W
- * Max temperature around 220C
- * On/Off switch
- * 360 degree swivel cord
- * Product size:28*38*4cm



LD2263

- * 110-240V,55W
- * Floating board
- * Heating plate size 95x32mm
- * Temperature display 120°C-220°C
- * 10°C a gear, default 180°C when power on
- * Automatic shutdown after 60 minutes
- * Wire 360 degree rotation, with storage lock



LD2359

- * AC 100-240V 50/60Hz
- * Ceramic coating barrel
- * PTC Heating element
- * 13 level temperature settings (100-230)
- * LED display
- * 360 degree swivel cord



LD2137

- * 2 in 1 hair straightener
- * 220-240V/50/60Hz 50W
- * PTC heater
- * On/Off button
- * Hanging loop
- * Max temperature: 200C
- * 360°swivel cord



LD2134

- * PTC heat element
- * Ceramic coating barrel
- * 110-240V 50/60Hz 50W
- * Temperature control with LCD display
- * Temperature control between 120-200C
- * ON/Off switch
- * 360 degree swivel cord
- * Hanging loop



LD2130A

- * AC 100-240V 50/60Hz
- * PTC Heating element
- * One hour auto shut off
- * 360 degree swivel cord
- * 25mm Ceramic coating barrel
- * 5 level temperature settings
- * LCD display



LD2131

- * AC 100-240V 50/60Hz 38W
- * PTC Heating element
- * LED indicator
- * 13-25mm Taper Ceramic coating barrel
- * Max temperature: 200 C
- * 360 degree swivel cord



LD2204

- * Hair Curlers
- * Ceramic coating barrel
- * On/Off switch
- * 360 swivel cord
- * LED Display
- * Cool tip for safety touch
- * PTC heater



LD2205

- * 2 in 1 hair curler
- * 30mins automatic power off
- * Temperature: 90 C ~230 C , (10 C per level, 13 levels in total)
- * 360 degree swivel cord
- * 110-240V 50/60HZ 61w
- * LED display



LD2138A

- * 110~240V 50/60Hz, 50W
- * PTC heater
- * Ceramic coating plates and Brush
- * ON/OFF switch
- * LCD power indicating light
- * Max temperature: 200°C
- * Lock & unlock switch
- * 360°Swivel cord



LD2137A

- * 2 in 1 hair straightener
- * 220-240V/50/60Hz 50W
- * PTC heater
- * On/Off button
- * Hanging loop
- * Max temperature: 200C
- * 360°swivel cord



LD2151

- * 110-240V 50/60HZ 45w
- * Light display
- * On/off switch
- * 360 degree swivel cord



LD2120

- * 110-240V 50/60HZ 45w
- * On/off switch
- * Foldable design
- * 360 degree swivel cord



LD2289

- * AC 100-240V 50/60Hz 55W
- * Ceramic coating barrel
- * PTC Heating element
- * On/off switch
- * LED indicator
- * 360 degree swivel cord



LD2306

- * AC 100-240V 50/60Hz
- * Ceramic coating barrel
- * PTC Heating element
- * On/off switch
- * LED indicator
- * 360 degree swivel cord



LD2193

- * 110-240V 50/60HZ 45w
- * LED display
- * On/off switch
- * 360 degree swivel cord



LD2194

- * 110-240V 50/60HZ 45w
- * LCD display
- * Five temperature settings
- * 360 degree swivel cord



LD2127

- * Mini hair curler
- * AC 100-240V 50/60Hz 35W
- * Product size: 270*50*70mm
- * 25mm Ceramic coating barrel
- * PTC Heating element
- * On/off switch
- * LED indicator



LD2297

- * 2 in 1 hair straightener and curler
- * AC 100-240V 50/60Hz 35W
- * 30mm Ceramic coating barrel
- * PTC Heating element
- * On/off switch
- * LED indicator
- * 360 degree swivel cord




LD2125

- * 110-240V 50/60HZ 45w
- * LED display
- * On/off switch
- * 360 degree swivel cord



LD2136

- * 110-240V 50/60HZ 45w
- * Light display
- * Five temperature settings
- * 360 degree swivel cord

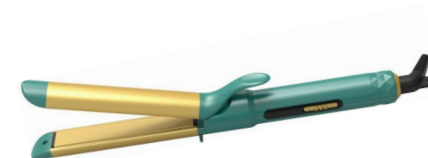

LD2152

- * 2 in 1 hair straightener and curler
- * AC 100-240V 50/60Hz 25W
- * 32mm Ceramic coating barrel
- * Max temperature: 200 C
- * Floating plate
- * PTC Heating element
- * LED indicator
- * 360 degree swivel cord



LD2254A

- * AC 100-240V 50/60Hz 50W
- * 140*25mm Ceramic coating barrel
- * PTC Heating element
- * Max temperature: 200 C
- * LED indicator
- * 360 degree swivel cord



LD2248

- * AC 100-240V 50/60Hz 38W
- * 9/13/16mm Ceramic coating barrel
- * PTC Heating element
- * Temperature setting 120-220 °C
- * LCD display
- * 360 degree swivel cord



LD2245

- * AC 100-240V 50/60Hz 45W
- * 140*25mm Ceramic coating barrel
- * PTC Heating element
- * Max temperature: 200 °C
- * LED indicator
- * 360 degree swivel cord



LD2257

- * AC 100-240V 50/60Hz 38W
- * 140*25mm Ceramic coating barrel
- * PTC Heating element
- * Max temperature: 200 °C
- * On/off switch
- * LED indicator
- * 360 degree swivel cord



LD2260

- * AC 100-240V 50/60Hz 45W
- * 140*25mm Ceramic coating barrel
- * PTC Heating element
- * Max temperature: 200 °C
- * On/off switch
- * LED indicator
- * 360 degree swivel cord



LD2250

- * AC 100-240V 50/60Hz 45W
- * 19/25/32mm Ceramic coating barrel
- * PTC Heating element
- * Temperature setting 120-220 °C
- * LCD display
- * 360 degree swivel cord



LD2273

- * AC 100-240V 50/60Hz 45W
- * 9/13/16/19/25/32mm Ceramic coating barrel
- * PTC Heating element
- * Max temperature: 200 °C
- * LED indicator
- * 360 degree swivel cord



LD2243

- * AC 100-240V 50/60Hz 45W
- * 140*25mm Ceramic coating barrel
- * PTC Heating element
- * Max temperature: 200 °C
- * On/off switch
- * LED indicator
- * 360 degree swivel cord



LD2296

- * AC 100-240V 50/60Hz 51W
- * 28mm Ceramic coating barrel
- * PTC Heating element
- * Max temperature: 200 °C
- * On/off switch
- * LED indicator
- * 360 degree swivel cord



LD2257A

- * AC 100-240V 50/60Hz 45W
- * 140*25mm Ceramic coating barrel
- * PTC Heating element
- * Max temperature: 200 °C
- * LED indicator
- * 360 degree swivel cord



LD2164

- * AC 100-240V 50/60Hz
- * 25mm Ceramic coating barrel
- * PTC Heating element
- * 5 level temperature settings
- * One hour auto shut off
- * LCD display
- * 360 degree swivel cord



LD2404

- * 110-240V 50/60HZ 60W
- * LCD lamp
- * Temperature: 100-230°C
- * PTC heater
- * Tube size: 25x150 MM/32x150 MM
- * 360 degree swivel cord



LD2405

- * 110-240V 50/60HZ 60W
- * LCD lamp
- * Temperature: 100-230°C
- * PTC heater
- * Tube size: 25x150 MM/32x150 MM
- * 360 degree swivel cord



LD2004

- * 110-240V 50/60HZ 45w
- * Switch button
- * Temperature control by Digital Display: 100/120/140/160/180/210°C
- * PTC heating element
- * 360 degrees swivel power cord
- * Five optional Curling diameter: 9/19/25/28/32mm
- * Curling length: 180mm
- * Automatic Lock in 5 seconds



LD2005

- * 110-240V 50/60HZ 45w
- * Light display
- * Five temperature settings
- * 360 degree swivel cord



LD2006

- * 110-240V 50/60HZ 45w
- * Light display
- * On/off switch
- * 360 degree swivel cord



LD2198

- * 110-240V 50/60HZ 60w
- * ON/OFF function
- * PTC heating element
- * 360 degrees swivel power cord
- * Curling diameter: 9/19/25/28/32mm
- * Curling length: 180mm

LD2314

- * AC 100-240V/50/60Hz/43W
- * Ceramic coating plate
- * PTC Heating element
- * LED indicator
- * Max temperature 200°C
- * 360 degree swivel cord



LD2027A

- * 110V/220V 60W/50/60Hz
- * Digital display screen
- * Temperature control 120-480°F/150-250°C
- * Ceramic coating plate (37.5mmx105mm)
- * Auto shut off
- * PTC quick heat up
- * 360° Swivel cord wires



LD2027B

- * 110V/220V 60W/50/60Hz
- * Digital display screen
- * Temperature control 120-480°F/150-250°C
- * Ceramic coating plate (37.5mmx105mm)
- * Auto shut off
- * PTC quick heat up
- * 360° Swivel cord wires





LD2275

- * 110-240V,50/60Hz,35W
- * Ceramic coating plates
- * LED display
- * Temperature control: 120-220°C
- * Lockable plate function
- * 360 swivel cord
- * Product Size: 295x60x42mm
- * Heating plate size: 75x20mm

Volumizing Hair Iron



LD2190

- * 100-240V,50/60Hz,60W
- * Floating Ceramic coating plate
- * PTC Heating element
- * 1 hour Auto off
- * 4 Temperature control 160°C, 180°C, 200°C, 220°C
- * Optional: ionic function
- * 360 degree swivel cord
- * With Hang up loop
- * Lockable handle



LD2191

- * 100-240V,50/60Hz,60W
- * Floating Ceramic coating plate
- * PTC Heating element
- * 1 hour Auto off
- * 4 Temperature control 160°C, 180°C, 200°C, 220°C
- * Optional: ionic function
- * 360 degree swivel cord
- * With Hang up loop
- * Lockable handle


LD2060A

- * AC 100-240V,50/60Hz,45W
- * Ceramic coating plate
- * PTC Heating element
- * 1 hour Auto off
- * On/off switch
- * Temperature control
- * 360 degree swivel cord
- * With Hang up loop



LD2061A

- * AC 100-240V,50/60Hz,45W
- * Ceramic coating plate
- * PTC Heating element
- * 1 hour Auto off
- * On/off switch
- * Temperature control
- * 360 degree swivel cord
- * With Hang up loop

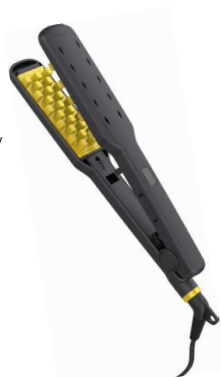

LD2264

- * AC 100-240V,50/60Hz,60W
- * Floating Ceramic coating plate
- * PTC Heating element
- * 1 hour Auto off
- * 4 Temperature control 160°C, 180°C, 200°C, 220°C
- * Optional: Ionic function
- * 360 degree swivel cord
- * With Hang up loop
- * Lockable handle



LD2166

- * 100-240V,50/60Hz,45W
- * Ceramic coating plate
- * PTC Heating element
- * 1 hour Auto off
- * On/off switch
- * Temperature control
- * 360 degree swivel cord
- * With Hang up loop



LD2267

- * AC 100-240V,50/60Hz,60W
- * Floating Ceramic coating plate
- * PTC Heating element
- * 1 hour Auto off
- * 4 Temperature control 160°C, 180°C, 200°C, 220°C
- * Optional: Ionic function
- * 360 degree swivel cord
- * With Hang up loop
- * Lockable handle

Negative ions (optional)
continuously care your hair

LD2344

- * Voltage 100-240V-50/60Hz
- * Net Dimension/mm316*31*42
- * Color box dimension/mm325*85*60 or customized
- * Qty per outer box 24Pcs or customized
- * Outer box dimension/mm340*355*375 or customized



LD2011

- * AC100-240V, 50/60Hz, 50W
- * Floating Ceramic coating plate
- * PTC Heating element
- * 1 hour Auto off
- * On/off switch
- * 360 degree swivel cord
- * With Hang up loop



LD2271

- * 110-240V30W
- * Heating plate size: 75x20mm
- * Body size: 270x25x44mm
- * Temperature display: 120C-220°C
- * 10°C in one gear, default 180 when power on
- * Automatic shutdown after 60 minutes
- * 360°swivel power cord



LD2218

- * 110V/220V 60W50/60Hz
- * Digital display screen
- * Temperature control 140-220°C
- * Ceramic coating plate
- * 1 hour auto shut off
- * PTC quick heat up
- * 360°Swivel cord wires



LD2218A

- * 110V-220V50-60Hz
- * LED digital display
- * 4 temperatures form 100°C to 200C
- * Floating plate
- * lock function
- * 360°swivel power cord with hanging loop



LD2216

- * Double straight -ceramic dual plate straightener
- * AC 110-220V 50/60Hz, 60W
- * LED display
- * Temperature range: 130C-230°C
- * Floating plate
- * Ceramic coating plate



LD2215

- * AC 100-240V 50/60Hz, 60W
- * Ceramic coating plate
- * PTC Heating element
- * On/Off switch
- * LED indicator
- * Max temperature: 220°C
- * 360 degree swivel cord



LD2266

- * 110-240V, 50/60Hz, 45-50W
- * Power switch
- * Temperature display 120C-220°C
- * Fast PTC Heating
- * With closed lock
- * Hot plate size: 95x45mm
- * 360°Swivel Power Cord



LD2265

- * 110-240V, 55W
- * Floating board
- * Heating plate size 95x32mm
- * Temperature display 120°C-220°C
- * 10°C a gear, default 180°C when power on
- * Automatic shutdown after 60 minutes
- * Wire 360 degree rotation, with storage lock



LD2312

- * Professional hair straightener
- * Digital LED display
- * ON/OFF switch
- * 150-230°C variable temperature control
- * Ceramic coating plates 40x100mm
- * Floating plates
- * 1 hour auto shut-off
- * 360°swivel power cord



LD2285

- * AC 110V~240V 50/60Hz, 40W
- * With indicator light
- * PTC Heater
- * Ceramic coating Heating
- * 360°Swivel power cord



LD2090

- * 110V~240V 50-60Hz, 35W
- * On/off switch
- * With PTC heater
- * Max temperature: 230°C
- * Temperature choices: 150°C—230°C
- * 360° swivel power cord



LD2189

- * 110V~240V 50/60Hz, 40W
- * With indicator light
- * PTC Heater
- * Ceramic coating Heating
- * 360° swivel power cord



LD2009

- * 100V~240V 50-60Hz, 42W
- * Hair straightener
- * PTC heating element
- * Ceramic coating plate
- * On/OFF switch with power on indicator light
- * LED display
- * Maximum Temperature 200°C
- * 360 degree swivel cord
- * Optional function: Infrared function and ionic function for optional



LD2154

- * 110V~240V 50/60Hz, 45W
- * Digital display temperature control
- * Fast PTC Heating
- * Temperature: 100°C-230°C
- * Automatic shutdown after 1 hour
- * Wire 360 degree rotation



LD2174

- * 110V~240V 50/60Hz, 55W
- * Floating board
- * Temperature display 120°C-220°C
- * Fast PTC Heating
- * LED display
- * Wire 360 degree rotation



LD2167

- * 110V~240V 50/60Hz, 55W
- * Floating board
- * Fast PTC Heating
- * LED display
- * Wire 360 degree rotation



LD2160

- * 110-240V 50/60HZ 45w
- * Light display
- * On/off switch
- * 360 degree swivel cord



LD2161

- * 110-240V 50/60HZ 45w
- * Fast PTC Heating
- * LED display
- * On/off switch
- * Temperature display 120°C-220°C
- * 360 degree swivel cord



LD2058

- * 100V~240V 50-60Hz, 42W
- * Tail rotating temperature control
- * 5 levels of temperature 150-230°
- * Floating aluminum plate
- * Heating plate size: 29X101MM
- * 360° anti-entanglement wire
- * 90 seconds actual temperature 220°C



LD2171

- * 110-240V 50/60HZ 50w
- * Floating plates
- * ON/OFF button
- * Temperature control
- * PTC heating element
- * 360°swivel power cord
- * Auto-off protection
- * Lock function



LD2157

- * 110-240V 50/60HZ 50w
- * Fast PTC Heating
- * LED display
- * On/off switch
- * 360 degree swivel cord



LD2158

- * 110-240V 50/60HZ 45w
- * Temperature control
- * Fast PTC Heating
- * LED display
- * On/off switch
- * 360 degree swivel cord



LD2076

- * 110-230V 50/60HZ 60w
- * LCD display
- * PTC heating
- * Heating plate size:50X100MM
- * 90 seconds fast heating
- * Double-click the switch to switch between Fahrenheit and Celsius
- * 2X0.5X2 meters 360° anti-entanglement round wire



LD2077

- * 110-230V 50/60HZ 60w
- * LCD display
- * PTC heating
- * Heating plate size:50X100MM
- * 90 seconds fast heating
- * Double-click the switch to switch between Fahrenheit and Celsius
- * 2X0.5X2 meters 360° anti-entanglement round wire



LD2080

- * 110-240V 50/60HZ 60W
- * On/off switch
- * High Temperature: 200°C
- * Floating plate
- * PTC heater
- * 360 degree swivel cord



LD2025

- * 110-240V 50/60HZ 60W
- * On/off switch
- * PTC heater
- * High Temperature: 200°C
- * On/OFF switch with power on indicator light
- * LED display
- * 360 degree swivel cord



LD2078

- * 110-230V 50/60HZ 52w
- * LCD display
- * PTC heating
- * Heating plate size:31X100MM
- * 90 seconds fast heating
- * Double-click the switch to switch between Fahrenheit and Celsius
- * 2X0.5X2 meters 360° anti-entanglement round wire



LD2079

- * 110-230V 50/60HZ 52w
- * LCD display
- * PTC heating
- * Heating plate size:31X100MM
- * 90 seconds fast heating
- * Double-click the switch to switch between Fahrenheit and Celsius
- * 2X0.5X2 meters 360° anti-entanglement round wire



LD2087

- * 100V~240V 50-60Hz,42W
- * Hair straightener
- * PTC heating element
- * Ceramic coating plate
- * On/OFF switch with power on indicator light
- * LED display
- * Maximum Temperature 200°C
- * 360 degree swivel cord
- * Optional function: Infrared function and ionic function for optional



LD2075

- * 110-240V 50/60HZ 60W
- * PTC heater
- * High Temperature: 200°C
- * Electroplated aluminum plate
- * 360 degree swivel cord



LD2081

- * 110-230V 50/60HZ 65w
- * LED display
- * PTC heating
- * Heating plate size:33X110MM
- * 120 seconds, maximum actual temperature 220°
- * 2X0.5X2m round wire 360° rotating anti-entanglement wire
- * Floating aluminum plate



LD2082

- * 110-230V 50/60HZ 65w
- * LED display
- * PTC heating
- * Heating plate size:33X110MM
- * 120 seconds, maximum actual temperature 220°
- * 2X0.5X2m round wire 360° rotating anti-entanglement wire
- * Floating aluminum plate



LD2389

- * 110-240V 50/60HZ 60W
- * On/off switch
- * High Temperature: 200°C
- * Floating plate
- * PTC heater
- * 360 degree swivel cord



LD2403

- * AC100-240V 50/60Hz, 35W
- * Floating Ceramic coating plate
- * PTC Heating element
- * Splint size: 26x11MM
- * On/off switch
- * LCD temperature control : 100-230°C
- * 360 degree swivel cord



LD2398

- * Mini Hair Straightener
- * Voltage: 110V-220V, 50Hz/60Hz
- * Power: 48W
- * Heating element: PTC
- * Temperature display: 140-220°C
- * 1 hour automatic power off



LD2401

- * 110-240V 50/60HZ 60W
- * LCD lamp
- * Temperature: 100-230°C
- * Aluminum plate + sprayed with ceramic glaze
- * PTC heater
- * Plate size: 26x11MM/44x105MM
- * 360 degree swivel cord



LD2396

- * 110-240V 50/60HZ 60W
- * On/off switch With LED lamp
- * Temperature: 450-950°F (10F/GEAR)
- * Floating plate
- * Aluminum plate + sprayed with ceramic glaze
- * PTC heater
- * 360 degree swivel cord



LD2374

- * 110-240V 50/60HZ 60W
- * PTC heater
- * High Temperature: 260°C
- * Electroplated aluminum plate
- * 360 degree swivel cord



LD2400

- * 110-240V 50/60HZ 60W
- * LCD lamp
- * Temperature: 100-230°C
- * Aluminum plate + sprayed with ceramic glaze
- * PTC heater
- * Plate size: 44*105MM
- * Plate: Flat plate/Wave plate (it can choose)
- * 360 degree swivel cord



LD2340

- * 110-240V 50/60HZ 53W
- * PTC heater
- * Plate size: 34.5X104.5MM
- * High Temperature: 190°C ± 10°C
- * LED display
- * Constant temperature ON/OFF switch
- * With lock function
- * 360 degree swivel cord



LD2402

- * Professional ionic hair dryer
- * 220-240V 50/60Hz, 1600-2000W
- * DC motor
- * With concentrator
- * Cool shot function
- * 2 heat settings
- * Straight handle
- * Over heat protection



LD2352

- * 110-240V 50/60HZ 53W
- * PTC heater
- * Plate size: 31X100MM
- * High Temperature: 228°C
- * LED display
- * 360 degree swivel cord



LD2356

- * 110v-240v 50/60Hz 19w
- * High Temperature: 200°
- * 2 PTC heating
- * PTC size 35X6mm
- * Narrow flat aluminum plate size 70X10mm
- * Corn aluminum plate/flat aluminum plate/fluffy aluminum plate size 70X17mm
- * Product size 190X20.5X28MM
- * Product weight 145g

LD2372

- * AC 100-240V 50/60Hz, 35W
- * Floating Ceramic coating plate
- * PTC Heating element
- * Splint size: 45x120MM
- * On/off switch
- * 8-level Led temperature control
150°C, 160°C, 170°C, 180°C, 190°C
200°C, 210°C, 220°C
- * 360 degree swivel cord



LD2323

- * AC 100-240V 50/60Hz, 35W
- * Floating Ceramic coating plate
- * PTC Heating element
- * 1 hour Auto off
- * On/off switch
- * 5-level Led temperature control
120°C, 140°C, 160°C, 180°C, 200°C
- * 360 degree swivel cord




LD2287

- * Hair Straightener
- * 110-240V 35W
- * Floating and ceramic coating plate
- * PTC heater
- * On/Off switch
- * Max Temperature: 200°C 10C
- * 360 degree swivel cord



120924

- * Hair straightener
- * rCeramic coating plate
- * PTC heating element
- * 110-240V 50/60Hz
- * ON/OFF SWITCH with temperature control LCD display
- * 360°swivel power cord

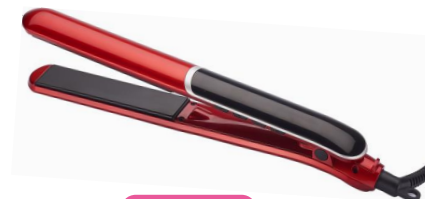

LD2220

- * 110V/220V, 60W, 50/60Hz
- * LED indicator
- * 6 Temperature control:
120°C, 140°C, 160°C, 180°C, 200°C, 220°C
- * Ceramic coating plate
- * Auto shut off
- * PTC quick heat up
- * 360°swivel power cord




LD2225

- * AC 100-240V 50/60Hz, 35W
- * Floating Ceramic coating plate
- * PTC Heating element
- * On/off switch
- * 360 degree swivel cord with Hang up loop



LD2059

- * Hair straightener and curler
- * 110-240V 50/60Hz 45W
- * PTC Heating element
- * Ceramic coating aluminum plate
- * LCD display digital temperature control
- * ON/OFF switch
- * 360 degree swivel cord

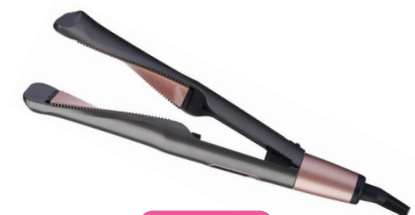

LD2288

- * AC 110-240V 50/60Hz, 40 W
- * Floating Ceramic coating plate
- * PTC Heating element
- * On/off switch
- * Max Temperature control: 230°C
- * 360°swivel power cord



LD2283

- * Professional hair straightener
- * Digital LED display
- * 90 seconds to heat up quickly
- * Aluminum ceramic plate
- * 360°swivel power cord
- * PTC heating



LD2311

- * AC 100-240V 50/60Hz, 50W
- * LED display temperature from 100-230°C
- * PTC heater
- * 1 hour auto-off protection
- * 360°swivel power cord
- * Lockable handle





LD2196

- * Hair Straightener
- * 110-240V, 35W
- * Floating and ceramic coating plate
- * PTC heater
- * On/Off switch
- * Max Temperature: 200°C
- * 360 degree swivel cord



LD2305

- * AC110-240V 50/60Hz, 30W
- * Floating plate
- * White LED light
- * PTC heater
- * On/Off switch
- * 360 degree swivel cord



LD2013

- * Professional hair straightener
- * Digital LED display
- * 90 seconds to heat up quickly
- * Aluminum ceramic plate
- * 360°swivel power cord
- * PTC heating



LD2175

- * 110V~240V 50-60Hz, 35W
- * On/off switch
- * With PTC heater
- * Ceramic coating plate size: 26x10mm
- * Max temperature: 230°C
- * Temperature choices: 150°C—230°C
- * 360° swivel power cord




LD2214

- * Ceramic or tomeline coating plates
- * PTC heating elements
- * LED indicator
- * On/Off switch
- * 360 degree swivel power cord



LD2219

- * Floating ceramic coating plates
- * PTC heating element
- * Temperature control
- * LCD display
- * On/Off switch
- * 360 degree swivel cord
- * 60 minutes auto-off

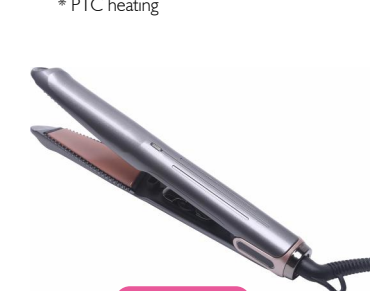

LD2240

- * Hair straightener and curler
- * 110-240V 50/60Hz 45W
- * PTC Heating element
- * Ceramic coating aluminum plate
- * LED display digital temperature control
- * ON/OFF switch
- * 360 degree swivel cord



LD2327

- * Professional Hair Straightener
- * Floating plates & lockable handle
- * ON/OFF switch for power control
- * "+" & "-" buttons for temperature control
- * LED display temperature
- * PTC heater
- * 1 hour auto shut-off
- * 360°swivel power cord with hanging loop




LD2320

- * Main powered
- * PTC heat element
- * Ceramic coating plate
- * On/Off switch
- * Temperatures control(50-249°C)
- * Lockable switch
- * 360 degree swivel cord




LD2139

- * Hair straightener
- * Mains powered
- * PTC heating element
- * Ceramic coating plate
- * On/OFF switch with power on indicator light
- * Maximum Temperature 200°C
- * 360 degree swivel cord
- * Optional function: Infrared function and ionic function for optional

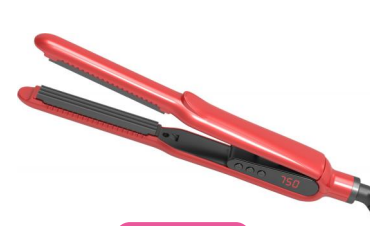

LD2262A

- * 110-240V, 50/60Hz, 25-30W
- * Power switch
- * Temperature display 120°C-220°C
- * Fast PTC Heating
- * With closed lock
- * 360°Swivel Power Cord

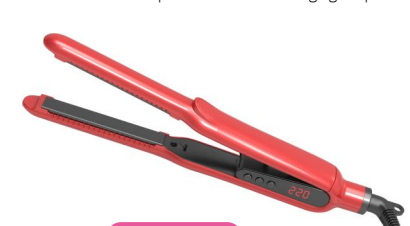

LD2261A

- * 110-240V, 50/60Hz, 25-30W
- * Power switch
- * Temperature display 120°C-220°C
- * Fast PTC Heating
- * With closed lock
- * 360°Swivel Power Cord



LD2252

- * 100-240V 50/60Hz, 25W
- * Ceramic coating plate
- * On/Off switch
- * PTC heater
- * Max. Temperature: 180°C



LD2322

- * AC 100-240V, 50/60Hz, 50W
- * Ceramic coating plate
- * PTC Heating element
- * 1 hour Auto off
- * On/off switch
- * 360 degree swivel cord
- * With Hang up loop



LD2284

- * AC 100-240V 50/60Hz, 30W
- * Ceramic coating plate
- * LED indicator
- * PTC Heating element
- * On/Off switch
- * 360 degree swivel cord



LD2274

- * AC 100-240V, 50/60Hz, 37W
- * Floating Ceramic coating plate
- * PTC Heating element
- * 1 hour Auto off
- * On/off switch
- * Temperature control
- * 360 degree swivel cord



LD2281

- * PTC heat element
- * Ceramic coating plate
- * With LED indication
- * 110-240V 50/60Hz
- * On/Off switch
- * 360 degree swivel cord
- * Worldwide voltage
- * Hanging loop



LD2270

- * AC 100-240V 50/60Hz, 55-60W
- * Ceramic coating plate
- * PTC Heating element
- * LED display
- * On/Off switch
- * 360 degree swivel cord



LD2217

- * AC 110-240V 50/60Hz, 44W
- * Ceramic coating plates
- * PTC Heating element
- * Cool air technology
- * Temperature control
- 140°C, 160°C, 180°C, 200°C, 220°C
- * Product size: 275x50x35 mm
- * 360 degree swivel cord



LD2012

- * Aluminum plate size: 25x105mm
- * Product size: 280x33mm
- * AC 150-230V 56W
- * Temperature adjustable 150°C-230°C
- * Large display 15x50mm, white light display
- * MCH heating element, fast heating
- * Safety using one hour automatically shut down
- * Celsius and Fahrenheit can be switched freely



LD2010

- * AC 110-240V 50/60Hz, 40 W
- * Floating Ceramic coating plate
- * PTC Heating element
- * On/off switch
- * Max Temperature control: 250°C
- * 360 degree swivel cord



LD2149

- * 110-240V, 50/60Hz, 25-30W
- * Power switch
- * Temperature display 120°C-220°C
- * Fast PTC Heating
- * With closed lock
- * 360° Swivel Power Cord



LD2336

- * AC 110-240V 50/60Hz, 40 W
- * Floating Ceramic coating plate
- * PTC Heating element
- * On/off switch
- * Max Temperature control: 250°C
- * 360 degree swivel cord



LD2368

- * Anti scalding design
- * Straight roll dual purpose
- * Temperature display (10 levels can be selected)
- * LED display
- * On/off button
- * 360 degree swivel cord



LD2415

- * 110V-240V 50-60Hz, 35W
- * On/Off switch
- * PTC heater
- * Ceramic coating plate
- * Plate size: 110x50mm/110x67mm
- * LCD display
- * Max temperature: 220°C
- * 360° Swivel cord



LD2414

- * 110V-240V 50-60Hz, 35W
- * On/Off switch
- * PTC heater
- * Ceramic coating plate
- * Plate size: 110x50mm/110x67mm
- * LCD display
- * Max temperature: 220°C
- * 360° Swivel cord



LD2383

- * AC 110-240V 50-60Hz, 50W
- * LED Digital Display
- * Ceramic Coating Plate
- * Floating Ceramic coating plate
- * Fast PTC heater, NTC control
- * On/off switch
- * Temperature control
- * 360 degree swivel cord



LD2384

- * Hair Straightener
- * 120-240V, 60W
- * Floating and ceramic coating plate
- * Five temperature Setting: 100°C-230°C
- * PTC heater
- * Plate size: 125x38MM



LD2407

- * AC 110-240V 50/60Hz, 65W
- * Temperature display switchable
- * LCD digital display
- * 1 hour automatic power off
- * Tail lock function
- * 360 degree swivel cord



LD2350

- * 110V-220 50-60Hz
- * LED digital display
- * Temperatures from 120°C to 230°C
- * Floating plate
- * Optional: Ionic function



LD2213

- * Floating Ceramic coating plate
- * PTC Heating element
- * 1 hour Auto off
- * On/off switch
- * High temperature 250°C
- * 360 degree swivel cord



LD2375

- * AC 110-240V 50/60Hz, 44W
- * Ceramic coating plates
- * PTC Heating element
- * Cool air technology
- * Temperature control
- 140°C, 160°C, 180°C, 200°C, 220°C
- * Product size: 275x50x35 mm
- * 360 degree swivel cord



LD2377

- * The blue 4-digit digital displays
- * 90 seconds to heat up quickly
- * Aluminum ceramic plate
- * 360 degree anti-winding wire
- * PTC heating
- * Double click to turn on the
- * Fahrenheit Celsius conversion



LD2409

- * AC 100-240V 50/60Hz, 35W
- * Floating Ceramic coating plate
- * PTC Heating element
- * On/off switch
- * 6 temperature control
- 120°C, 140°C, 160°C, 180°C, 200°C, 230°C
- * Optional: Ionic function
- * Product size: 255x30x40mm
- * 360 degree swivel cord with Hang up loop
- * Lockable handle



LD2351

- * AC 100-240V, 50/60Hz, 60W
- * Floating Ceramic coating plate
- * PTC Heating element
- * 1 hour Auto off
- * Touch screen controller
- * Temperature control 120-230°C
- * Optional: Ionic function
- * 360 degree swivel cord
- * With Hang up loop



LD2357

- * AC 100-240V 50/60Hz, 50W
- * PTC heater
- * 360°swivel power cord
- * Lockable handle



LD2203

- * 100V-240V 32W
- * Spray high temperature ceramic glaze coating
- * Temperature: 200 C
- * Product size: 275mmx30mmx33mm
- * Product weight: 300g
- * 360 degree swivel cord



LD2385

- * 110V-240V 50-60Hz, 35W
- * On/Off switch
- * PTC heater
- * Ceramic coating plate size: 100*25mm
- * Max temperature: 230° C
- * 360° Swivel cord



LD2360

- * 110-240V 50/60Hz, 65W
- * LCD indicator
- * Temperature settings: 140-240 C
- * Fast PTC/MCH Heating
- * With closed lock
- * Hot plate size: 140*100MM
- * 360° Swivel Power Cord



LD2413

- * 110V-240V 50-60Hz, 35W
- * On/Off switch
- * PTC heater
- * Ceramic coating plate
- * Plate size: 110x50mm/110x67mm
- * LCD display
- * Max temperature: 220° C
- * 360° Swivel cord



LD2200

- * Instant Heating Hair Straightener
- * 100-240V 30W
- * Ceramic plate
- * PTC Heater
- * Temperature: 180°C, 200°C, 230°C
- * Fast Heating Technology
- * 25s Fast heating up to 200°C
- * 33s fast heating up to 230°C



LD2199

- * 100-240V, 50/60Hz, 55-65W
- * 24x110mm heating plate
- * On/OFF button
- * 360 swivel cord



LD2410

- * Power(100-240V 50/60Hz)85 watts (W)
- * Maximum temperature: 220°C
- * With closed lock
- * Temperature adjustment function
- * 360°swivel power cord
- * Hot plate size: 56x120mm
- * Product size: 330x60x35mm
- * Five LED lights display 150°C-230°C



LD2363

- * Floating Ceramic coating plate
- * PTC Heating element
- * 1 hour Auto off
- * On/off switch
- * Heating plate size: 25X100mm/36X110mm/50X110mm
- * 5 temperature control 150 C , 170 C , 190 C , 210 C , 230 C
- * 360° degree swivel cord
- * Hang up loop

LD2132A

- * I 110-240V 50/60Hz 38W
- * PTC heating
- * Max temperature: 200 °C
- * LED indicator
- * Barrel size: 172* φ 25mm
- * 360 degree swivel cord



LD2237

- * AC 100-240V 50/60Hz 55W
- * 32mm Ceramic coating barrel
- * PTC Heating element
- * Temperature setting 100-230 °C
- * One hour auto shut off
- * 360 degree swivel cord



LD2269

- * AC 100-240V 50/60Hz 55W
- * Ceramic coating barrel
- * PTC Heating element
- * On/off switch
- * LED indicator
- * 360 degree swivel cord



LD2056A

- * AC 100-240V 50/60Hz 55W
- * Ceramic coating barrel
- * PTC Heating element
- * On/off switch
- * LED indicator
- * 360 degree swivel cord



LD2050

- * AC 100-240V 50/60Hz 55W
- * Ceramic coating barrel
- * PTC Heating element
- * On/off switch
- * LED indicator
- * 360 degree swivel cord



LD2133

- * I 110-240V 50/60Hz 38W
- * PTC heating
- * Max temperature: 200 °C
- * LED indicator
- * Barrel size: 172* φ 25mm
- * 360 degree swivel cord



LD2133

- * I 110-240V 50/60Hz 38W
- * PTC heating
- * Max temperature: 200 °C
- * LED indicator
- * Barrel size: 170* φ 25mm
- * 360 degree swivel cord



Steam straightener

LD2345

- * voltage: 110-240V 50/60Hz 65W
- * aluminum plate spray ceramic powder,
- * length 10*40MM
- * Digital display
- * temperature adjustable: 100-230
- * 360° rotating wire
- * 1.8m power cord length
- * one hour automatic shutdown function
- * Body size 330X45X43MM



LD2309

- * AC 110-240V 50/60Hz, 60W
- * Infrared function
- * LCD digital display
- * 1 hour automatic power off
- * Tail lock function
- * 360 degree swivel cord



LD2310

- * AC 110-240V 50/60Hz, 60W
- * Infrared function
- * LCD digital display
- * 1 hour automatic power off
- * Tail lock function
- * 360 degree swivel cord



LD2381

- * AC 110-240V 50/60Hz, 65W
- * Infrared function
- * Temperature display switchable
- * LCD digital display
- * 1 hour automatic power off
- * Tail lock function
- * 360 degree swivel cord
- * Product package size: 34x5.1x4.5cm



LD2381A

- * AC 110-240V 50/60Hz, 65W
- * Infrared function
- * Temperature display switchable
- * LCD digital display
- * 1 hour automatic power off
- * Tail lock function
- * 360 degree swivel cord
- * Product package size: 34x5.1x4.5cm



LD2238

- * AC 100-240V, 50/60Hz, 60W
- * Titanium plate
- * PTC Heating element
- * 1 hour Auto off
- * Nano moisture spray device
- * On/off switch
- * 6-level Led temperature control 140°C, 160°C, 180°C, 220°C
- * 360 degree swivel cord



LD2241

- * Professional Hair Salon Steam Styler
- * 100-240V~50/60Hz 25-30W
- * 2 Inch Width Plate
- * Plate-Locking Switch
- * Temperature control 2 modes (180°C - 230°C)
- * 1 hour auto shut-off safe
- * Steam Lock function
- * 360 degree swivel power cord



LD2149

- * AC 110-240V 50/60Hz, 50W
- * Infrared function
- * Plate size: 110*24mm
- * Temperature display 120-220°C
- * 1 hour automatic power off
- * Tail lock function
- * 360 degree swivel cord
- * Optional: Ionic /vibration function



LD2313

- * Professional Hair Salon Steam Styler
- * 2 Inch Width Plate
- * Plate-Locking Switch
- * 6 Temperature Settings
- * Steam Lock function
- * 360° Rotatable Power Cord



Mini Sense Hair Straightener

LD2099

- * Mini flat iron
- * AC 220-240V 50/60Hz 18W
- * Ceramic coating plates
- * PTC heating element
- * LED indicator light
- * Product size: 175 x 25 x 60mm
- * Hot plate size: 66 x 17mm
- * 360°swivel cord



LD2100

- * AC 110-240V 50/60Hz, 25W
- * Floating Ceramic coating plate
- * PTC Heating element
- * On/off switch
- * LED indicator
- * Plate size: 71.2x23.4mm
- * Product size: 205x30x35mm
- * 360 degree swivel cord



LD2178

- * AC 100-240V, 50/60Hz, 60W
- * Titanium plate
- * PTC Heating element
- * 1 hour Auto off
- * Nano moisture spray device
- * On/off switch
- * 6-level Led temperature control 140°C, 160°C, 180°C, 220°C
- * 360 degree swivel cord



LD2169

- * AC 110-240V 50/60Hz 43W
- * Ceramic coating barrel
- * PTC Heating element
- * Barrel size: 13x86mm
- * Anti-scald design on the top of barrel
- * On/off switch
- * LED indicator
- * Product size: 280x50x60mm
- * 360 degree swivel cord
- * With Hang up loop



LD2358

- * LED indicator
- * PTC heater element
- * Max. Temperature: 190°C
- * Voltage: 110-240V 50/60Hz
- * ON/OFF switch



LD2201

- * MINI hair curler
- * AC 100V-240V, 50/60Hz, 25W
- * PTC Heating Element
- * Ceramic Coating
- * Max Temperature: 200°C
- * ON/OFF Switch with indicator



LD2122

- * AC 110-240V 50/60Hz, 25W
- * Floating Ceramic coating plate
- * PTC Heating element
- * On/off switch
- * Plate size: 71.2x23.4mm
- * Product size: 205x30x35mm
- * 360 degree swivel cord



LD2145

- * Mini hair curer
- * Main powered
- * PTC heat element
- * 220-240V~, 50/60Hz, 20W



LD2071

- * Mini hair curer brush
- * Main powered
- * PTC heat element
- * 220-240V~, 50/60Hz, 20W






LD2067

- * Mini hair curer
- * Main powered
- * PTC heat element
- * 220-240V~, 50/60Hz, 20W



LD2070

- * Mini hair curer
- * Main powered
- * PTC heat element
- * 220-240V~, 50/60Hz, 20W



LD2074

- * MINI hair curler
- * AC 100V-240V~, 50/60Hz, 25W
- * PTC Heating Element
- * Ceramic Coating
- * Max Temperature: 200°C
- * ON/OFF Switch with indicator



LD2103

- * 110-125V/220-240V~, 50/60Hz, 20W
- * On/ Off Switch
- * On/Off indicator
- * PTC fast heating
- * Max. temperature: 180°C
- * Aluminium plates with ceramic coating



LD2107

- * Mains powered
- * PTC heat element
- * Ceramic coating plate
- * On/Off switch
- * 360 degree swivel cord
- * Worldwide voltage
- * Hanging loop



LD2069

- * Mini hair curer
- * Main powered
- * PTC heat element
- * 220-240V~, 50/60Hz, 20W

2 in 1

Hair Straightener Brush

LD2086

- * Input voltage: 100V~240V
- * Power: 75W
- * PCBA circuit protection function
- * 30 minutes smart shutdown
- * Press and hold the switch for 3 seconds
- * Power cord: 360 degree rotation
- * VDE plug 1.8m 2*0.5mm² wire



LD2348

- * 2 IN1 Hair straightener with brush
- * AC 100-240V 50/60Hz, 55-60W
- * Ceramic coating plate
- * PTC heater element
- * LED display
- * On/off switch
- * LED temperature control
- 120°C, 140°C, 160°C, 180°C, 200°C *Optional: Ionic function
- * 360 degree swivel cord



LD2221

- * 120V-220V, 50/60Hz, 450W
- * 0-1-2-3 heater Settings
- * Low speed & Low heat
- * High speed & High heat
- * Hair straightener function (aluminum tooth heater, No speed)
- * 360°swivel cord



LD2242

- * Comb with steam spray blower
- * 360 degree rotating wire
- * First gear cold wind
- * High heat in the second gear
- * Tuiye temperature 110/130°C



LD2280

- * Main powered
- * Brush design to let the hair pass more smoothly, easy to use it
- * Temperature control with LCD display
- * PTC fast heating element
- * Worldwide voltage
- * 360°swivel cord



LD2255A

- * AC 110-240V, 50/60Hz, 45W
- * heater plate size: 120x25mm
- * Unit size: 315x52x38mm
- * 360 degree swivel cord
- * With hanging loop
- * Temperature range: 150°C, 170°C, 190°C, 210°C



LD2163

- * Nano moisture spray device
- * 100-240V-50/60Hz 60W
- * Heating temperature: 80°C-230°C
- * PTC heating elements, On-off switch
- * Heating time: Approx 1-3 minutes
- * 360 degree swivel power cord
- * LCD display



LD2015

- * 110-240V 50/60HZ 30W
- * Power Switch
- * Fast PTC Heating
- * 360° Swivel Power Cord
- * Auto Shut-off After an Hour
- * Temperature control with LED indication



LD2253

- * Main powered
- * PTC fast heating element
- * Temperature control with LCD display
- * Worldwide voltage
- * Brush design to let the hair pass more smoothly, easy to use it
- * 360°swivel cord



LD2031

- * 60 mins auto shut off
- * Temperature range: 120/140/160/180/200°C
- * ON/OFF switch
- * 360°Swivel Cord



LD2423

- * Blue digital display 100-200°C
- * Default is 180°C when turned on
- * Automatically shut down in one hour.
- * Rated voltage: 110V-240V~, 50-60Hz.
- * Rated power: about 55W.
- * Heating plate size: 102x52MM.
- * Product size: 260x60x43MM



LD2202

- * 220W 240V 50/60Hz. 550W
- * DC motor
- * 0-1-2-3 heater Settings
- * Low speed & Low heat
- * High speed & High heat
- * Hair straightener function (aluminum tooth heater, No speed)
- * 360°swivel cord



LD2255

- * AC 110-240V, 50/60Hz, 45W
- * heater plate size: 120x25mm
- * Unit size: 315x52x38mm
- * 360 degree swivel cord
- * With hanging loop
- * Temperature range: 150°C, 170°C, 190°C, 210°C



LD2325

- * 2IN1 HAIR CURLER & STRAIGHTENER
- * ON/OFF
- * Heating element: PTC
- * 360 degree swivel cord



LD2033

- * 110-240V 50/60Hz. 40W
- * Switch: 0-1-2
- * Temperature: 220°C
- * 360 degree swivel Power cord
- * Indicator light
- * PTC heating element
- * Plate size: 90mmx25.4mm



LD2365

- * Voltage: 110v-240v 50/60Hz
- * Power: 33w
- * Ceramic coating plate
- * PTC Heating element
- * Plate size: 80X25mm
- * Temperature setting: 160-180-200 °C



LD2354

- * Travel Straightener Brush
- * 100-240V 50/60Hz, 25W
- * LED Indicator 160°C-220°C
- * PTC Heater
- * Negative ions (optional)



LD2422

- * LCD Indicator 160°C-220°C
- * Default setting is 180°C when powered on
- * Automatically shut down in one hour
- * Rated voltage: 110V-240V~, 50-60Hz.
- * Rated power: about 90W.
- * Heating plate size: 184×32MM.
- * Negative ions (optional)



LD2084

- * 110V-240VAC, 50/60Hz, 47W
- * PTC heat element
- * On/Off switch
- * 60mins auto shut off
- * 360 degree swivel cord



LD2091

- * AC 110-240V, 50/60Hz, 45W
- * heater plate size: 120x25mm
- * Unit size: 315x52x38mm
- * 360 degree swivel cord
- * With hanging loop
- * Temperature range: 150°C, 170°C, 190°C, 210°C



LD2211

- * Voltage: AC 110-220V Frequency: 50/60Hz
- * Rated power: 30W
- * 360-degree power cord rotation
- * Heating element: PTC
- * Temperature display: 80-230°C



LD2212

- * Voltage: AC 110-220V Frequency: 50/60Hz
- * Rated power: 30W
- * 360-degree power cord rotation
- * Heating element: PTC
- * Temperature display: 80-230°C



LD2048

- * PTC heat element
- * On/Off switch
- * Temperature adjustment: 100°C - 230°C
- * 60mins auto shut off
- * 360 degree swivel cord



LD2364

- * Voltage: 110v-240v 50/60Hz
- * Power: 33w
- * Ceramic coating plate
- * PTC Heating element
- * Plate size: 80*25mm
- * Temperature setting: 160-180-200°C



LD2014

- * AC 220-240M 50/60Hz, 26W
- * 1 hour auto shutdo
- * On/Off Switch
- * Temperature: 120-200°C (adjustable)
- * 360°Swivel Cord




LD2021

- * AC 220-240M 50/60Hz, 26W
- * 60 mins auto shut off
- * Temperature range: 120/140/160/180/200°C
- * ON/OFF switch.
- * 360°Swivel Cord



LD2247

- * Mains powered
- * PTC heating element
- * 110mm Ceramic coating barrel
- * On/OFF switch
- * 360 degree swivel cord

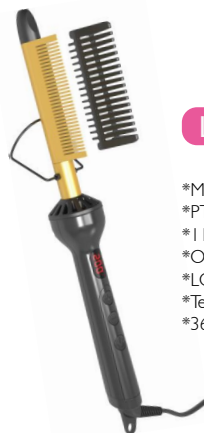

LD2251

- * Mains powered
- * PTC heating element
- * 110mm Ceramic coating barrel
- * On/OFF switch
- * LCD digital display with Temperature
- * Temperature range: 120-200°C
- * 360 degree swivel cord



LD2334

- * AC 100-240V 50/60Hz
- * PTC Heating element
- * On/off switch
- * LCD display: 140-220°C
- * 360 degree swivel cord
- * With Hang up loop



LD2335

- * AC 100-240V 50/60Hz 65w
- * PTC Heating element
- * On/off switch
- * LED indicating light: 140-220°C
- * 360 degree swivel cord



LD2045

- * AC 100-240V 50/60Hz 35w
- * PTC Heating element
- * LED indicating light
- * 360 degree swivel cord



LD2032

- * PTC heating element
- * On/OFF switch
- * LCD digital display with Temperature
- * Temperature range: 120-200°C
- * 360 degree swivel cord



LD2276

- * Waver plate with barrel
- * 110-240V 50/60Hz 35W
- * PTC heating
- * Max temperature: 200°C
- * LED indicator
- * Barrel size: 75* φ 13mm
- * 360 degree swivel cord



LD2047

- * Curve plate with barrel
- * 110-240V 50/60Hz
- * PTC fast heating
- * 7 level temperature settings
- * LED indicator
- * One hour auto shut off
- * 360 degree swivel cord



LD2155A

- * Waver plate with comb
- * 110-240V 50/60Hz 45W
- * PTC heating
- * Max temperature: 200°C
- * LED indicator
- * Lock function
- * 360 degree swivel cord



LD2129

- * Waver plate with comb
- * 110-240V 50/60Hz 48W
- * PTC heating
- * Temperature setting: 120-210°C
- * LCD display
- * Lock function
- * 360 degree swivel cord



LD2318

- * 4 in 1 interchangeable hair curler
- * 110-240V 50/60Hz
- * PTC heating
- * 7 level temperature settings
- * LED indicator
- * One hour auto shut off
- * 360 degree swivel cord



LD2180

- * Ceramic coating barrel
- * PTC Heating element
- * Anti-scald design on the top of barrel
- * 1 hour Auto off
- * On/off switch
- * Temperature control 100 C-200 C
- * 360 degree swivel cord
- * With Hang up loop

LD2094

- * AC100-240V, 50/60Hz, 50W
- * Ceramic coating Barrel
- * PTC Heating element
- * On/off switch
- * LED digital display
- * Temperature control: 130-230 C
- * 360 degree swivel cord



LD2324

- * Multi-functional hair styler
- * 110-240V 50/60Hz
- * PTC heating
- * On/Off switch
- * LED indicator
- * Max temperature: 200 C
- * 360 degree swivel cord



LD2326

- * Multi-functional hair styler
- * 110-240V 50/60Hz
- * PTC heating
- * Temperature setting: 120-200 C
- * LCD display
- * 360 degree swivel cord



LD2095

- * AC100-240V, 50/60Hz, 50W
- * Ceramic coating Barrel
- * PTC Heating element
- * On/off switch
- * LED digital display
- * Temperature control: 130-230 C
- * 360 degree swivel cord

LD2321

- * Automatic hair curler
- * AC 100-240V 50/60Hz 50W
- * One hour auto shut off
- * PTC Heating element
- * 6 level temperature settings
- * LCD display
- * 360 degree swivel cord



LD2173

- * Automatic Hair Twister Braider
- * 2 x AA batteries (not included)
- * size: 20*15*5cm



LD2043

- * AC 100-240V 50/60Hz, 40W
- * Ceramic coating barrel
- * PTC Heating element
- * 1 hour Auto off
- * On/off switch
- * Temperature control 100°C-230°C
- * The boot default temperature is 180°C
- * Temperature lock function
- * 360 degree swivel cord



LD2369

- * AC 100-240V 50/60Hz 72W
- * Ceramic coating 40mm barrel
- * PTC Heating element
- * On/off switch
- * LCD indicator
- * Negative ions (optional)
- * 360 degree swivel cord



LD2226

- * Foldable handle
- * 100-240V, 50-60Hz
- * Digital LCD display
- * "+"&"-" temperature control 100°C-230°C
- * Ceramic coating barrel 25mm diameter
- * 1 Hour auto-power off function
- * 360 swivel cord



LD2037

- * Hair end of trimmer
- * 1X1800mAh Li-ion Battery,
- * Rpm 5500
- * Charging time: 180minutes;
- * Working time: 120 minutes;
- * Electronic travel lock (press 3 seconds)
- * Mechanical safety lock,
- * Charging/ working indication light